



thyssenkrupp Engineered Plastics

DuPont™ Authorized Distributor



DuPont™ Vespel® Parts and Shapes: Insulator Solutions Vespel® SP-1 and SCP-5000

Characteristics


- Provide strong electrical and thermal insulation.
- High dielectric strength, low dielectric constant
- Low weight and easy to fabricate
- Thermal oxidation and ion degradation resistance
- Low outgassing and inherently clean
- Broad chemical compatibility

Used as specialty
insulators for
applications in:

- Scientific instrumentation
- Analytical equipment
- Avionics
- Communications
- Ultrasonics
- Transformers

DuPont™ Vespel® Parts and Shapes: Insulator Solutions

Meeting the insulator needs for scientific and analytical equipment using Vespel® SP-1 and SCP-5000

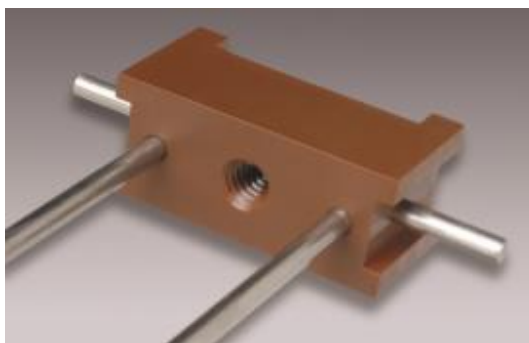

Mass spectrometry insulators require materials with high dielectric strength and low outgassing.



Down hole analytical instruments need strong thermal degradation resistance, dimensional stability, and impact toughness.

The science of DuPont™ Vespel® helps parts endure extreme environments from reactor chambers to deep space.

Vespel® parts and shapes are superb as solutions for insulator applications in scientific and analytical equipment. Vespel® SP-1 and SCP-5000 components not only provide strong electrical and thermal insulation, but they are low weight, easy to fabricate alternatives to traditional ceramics. Vespel® parts outperform other engineering plastic parts at high temperatures for extended periods of time.

Challenges

- Fabricating precise dimensions in ceramics is difficult and expensive
- Designing light electrical and thermal insulators with impact toughness
- Selecting materials with predictable properties to enable accurate and repeatable analyses
- Identifying materials with a diverse combination of characteristics to reduce design complexity and improve system reliability

Product Description

Vespel® SP-1 and SCP-5000 are high performance unfilled polyimides used to make tough electrical and thermal insulators. These products exhibit a unique combination of attributes:

- Excellent electrical properties: High dielectric strength, low dielectric constant
- Thermal oxidation and ion degradation resistance
- Low outgassing and inherently clean
- Broad chemical compatibility
- Ease of machining to precise dimensions with standard machining techniques

Solutions


A combination of material capabilities that transcends plastics and ceramics.

- Vespel® parts and shapes machine easily and they have electrical insulative properties like a ceramic. The advantage is low fabrication cost versus ceramics especially when there are precise design features such as under cuts, holes, or threads
- Vespel® parts and shapes are tough compared to traditional ceramics. This characteristic translates into lower scrap rates and better service life in high impact scenarios where cracking is an issue during fabrication, assembly, or operation
- Unlike most plastics, Vespel® SP-1 exhibit no glass transition temperature or melt point and maintains mechanical properties across a wide temperature range
- Vespel® SCP-5000 has a glass transition temperature at 626°F, but below this temperature it has higher strength, modulus, thermal oxidative stability, dimensional stability, and chemical resistance than Vespel® SP-1

Ultrasonic transducers in high temperature service need strong thermal insulators with consistent material properties.



Weight Loss Test Results — Exposure to Air at 662°F
DuPont™ Vespel® Retains Its Weight and Shape.

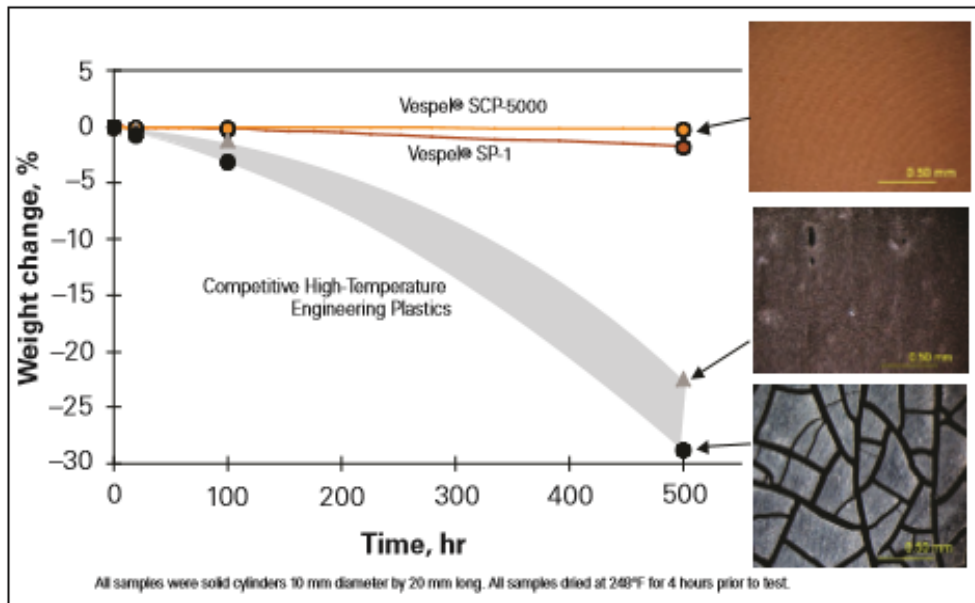

Where to use DuPont™ Vespel® SP-1 and SCP-5000 as an insulator?

Vespel® polyimide shapes have been used as specialty insulators for decades in applications in scientific instrumentation, analytical equipment, avionics, communications, ultrasonics, and transformers. Although appropriate use of Vespel® products is application specific, Vespel® SP-1 and SCP-5000 are often selected in the following instances:

- Operating temperatures to 550°F with thermal excursions to 900°F
- High differential voltages
- Hard vacuum down to 10⁻⁹ Torr
- Designs requiring multiple functions (insulator, seal conformity, low wear and low friction)
- Impact loads where ceramics fail
- Low weight requirements
- Geometries with fine features

Typical Properties of DuPont™ Vespel® Isostatic Shapes versus Alumina

	ASTM Test	Units	Vespel® SP-1	Vespel® SCP-5000	99.5%* Alumina
Mechanical					
Tensile Strength, 73°F	D1708/D638	ksi	12.5	23.4	43.5
Tensile Strength, 500°F	D1708/D638	ksi	6.0	9.0	
Elongation at Break, 73°F	D1708/D638	%	7.5	7.0	-0
Elongation at Break, 500°F	D1708/D638	%	6.0	>20	
Flex Modulus, 73°F	D790	ksi	450	836	
Flex Modulus, 500°F	D790	ksi	250	436	
Comp. Stress at 10% strain, 73°F	D695	ksi	19.3	33.3	
Electrical					
Dielectric Strength, 73°F (0.080 in)		kV/mil	560-760	686-787	229-432**
Dielectric Constant, 73°F (10 ⁴ -10 ⁶ Hz)			~3.6	~3.3	9.6-9.9**
Thermal					
Coeff. of Thermal Expansion, 73-500°F	D696	10 ⁻⁶ in/in/°F	30	24	2.6
Thermal Conductivity, 104°F		BTU in/hr/ft ² /°F	2.4	2.4	229
Other Properties					
Water Absorption, 24 hr at 73°F, 100% RH	D570	%	0.24	0.08	
Specific Gravity	D792		1.43	1.43	3.98
Hardness	D785	Rock E	45-60	95	

* Values from the National Institute of Standards and Testing.

** Unverified manufacturer data without reference to sample thickness or frequency.

Visit us at vespel.com

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract or other acknowledgement that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, ™ or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2021 DuPont. All rights reserved.





thyssenkrupp

Contact our expert team today!

877.246.7700

www.onlineplastics.com



DuPont™, the DuPont Oval Logo, DuPont™ Vespel® are trademarks or registered trademarks of DuPont or its affiliates. Copyright © 2022 DuPont de Nemours Inc.