



Model: **SCH-150-12** Size: 279\*57\*25mm  
**SCH-150-24**

**CE SELV**  **IP67** Waterproof **Ultra-thin**

## Brief Information

**Ultra-thin**  
25mm Height

# 150W

## Waterproof Power Supply (C.V.)

Model **SCH-150-12 / SCH-150-24**

Input **200~250V AC**

Output **12VDC 12.5A 150W / 24VDC 6.25A 150W**

## Product Features

- Compact size, easy for installation
- High transfer efficiency
- Wide input range
- Stable constant voltage output
- IP67, both indoor & outdoor use suitable
- 100% full loading, 100% burn-in tested
- Overload/short circuit protection

## 1 MAIN ELECTRICAL DATA

### AC Input

|                   |                  |
|-------------------|------------------|
| Input Voltage     | 200~250V         |
| Input Frequency   | 50/60Hz          |
| Efficiency (Typ.) | 87%              |
| Input Current     | 230V: 1.45A max. |
| Inrush Current    | 40A              |
| Leakage Current   | 3mA/230VAC       |

### DC Output

|                       |               |               |
|-----------------------|---------------|---------------|
| Output Voltage        | 12V           | 24V           |
| Rated Current         | 12.5A         | 6.25A         |
| Rated Power           | 150W          | 150W          |
| Ripple & Noise (Max.) | <100mVp-p     | <100mVp-p     |
| Setup, Rise Time      | 1500ms/230VAC | 1500ms/230VAC |
| Line Regulation       | 1%            | 1%            |
| Load Regulation       | 1%            | 1%            |

## Service Environment

|                  |            |
|------------------|------------|
| Working Temp.    | -30°C~50°C |
| Working Humidity | 20~95%RH   |
| Storage Temp.    | -40°C~50°C |
| Storage Humidity | 10~95%RH   |

## Protection

|               |                                                                           |
|---------------|---------------------------------------------------------------------------|
| Overload      | Yes, cut-off mode, output shuts down if over-loaded                       |
| Short Circuit | Yes, hiccup mode, recovers automatically after fault condition is removed |

## Safety

|                      |                                            |
|----------------------|--------------------------------------------|
| Safety Standard      | EN 61347-2-13                              |
| Withstand Voltage    | I/P-O/P: 3750VAC/1min/<5mA                 |
| Isolation Resistance | I/P-O/P: >100M Ohms / 500VDC /25°C / 70%RH |


## 1 Packaging Information

|                     |              |
|---------------------|--------------|
| Product Dimension   | 279*57*25mm  |
| Products Net Weight | 680G         |
| PCS/Carton(QTY)     | 25 PCS       |
| Master Carton Size  | 41.5*33*18cm |
| G. Weight/ Carton   | 18KG         |

### Installation Tips:

- Please identify the power supply's input and output before installation.
- Ensure correct output + & - wire connection.
- Power on after wire connection is done.
- To avoid voltage drop and loading capacity wasting on the output extension wire, please install the power supply to the loading as near as possible, if must use long extension wires, thicker wires and less loading wattage is required.
- The power supply to be installed at good ventilation and cooling environment.

## 1 Physical Drawing

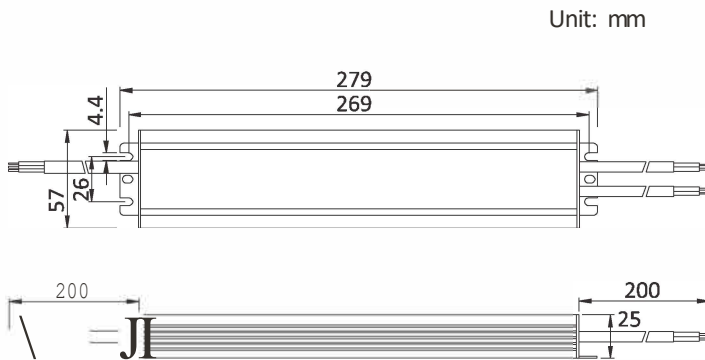

### Brief Information

**Ultra-thin**  
25mm Height

**150W**

### Waterproof Power Supply (C.V.)

Model SCH-150-12 / SCH-150-24

Input 200~250V AC


Output 12VDC 12.5A 150W / 24VDC 6.25A 150W

Input: 3x1.0mm<sup>2</sup> wire, Brown L, Blue N  
200mm length


Output: 2x0.75mm<sup>2</sup> wire, Red+, Black -  
200mm length

Housing: Aluminium

## 1 Block Diagram

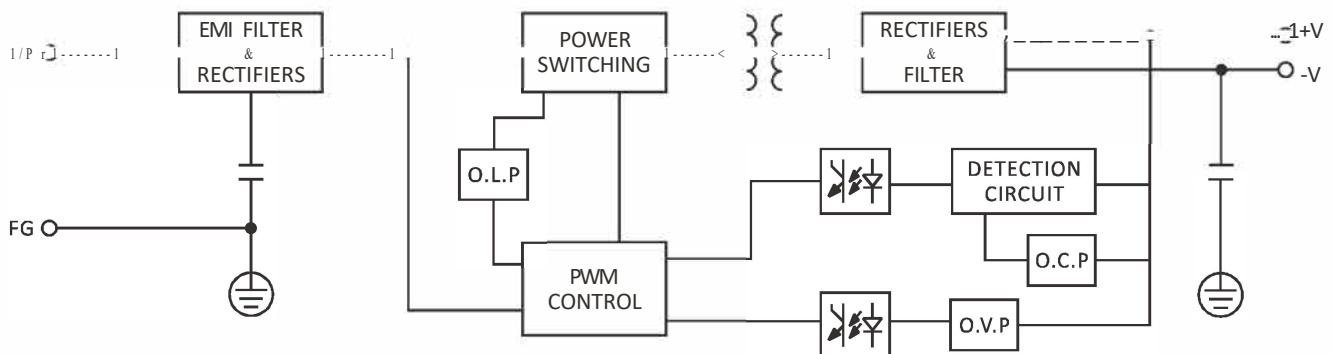

## 1 Derating Curve

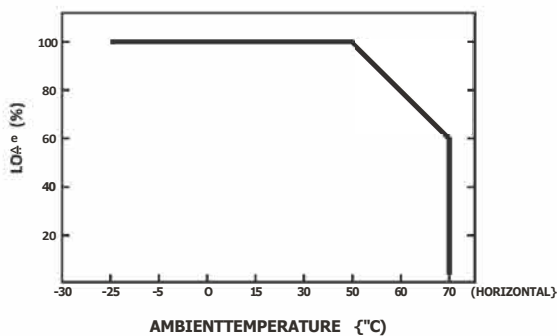

## 1 Static Characteristics

